


Features

- POTS -3dB cutoff frequency: 10kHz,
- Attenuation: 300Hz-3.4kHz, -1.0dB Max
- D.C. Resistance each line: 25Ohm Max.
- Insertion loss (@200Hz to 4KHz) -1dB Max.,60KHz to 90KHz> -20dB Max.
- 120KHz-300KHz>-40dB,500KHz-1104KHz>-65dB
- Return loss: 300-3.4kHz, -14dB Min.
- Longitudinal balance(CMRR): @200Hz to 1kHz,-58dB Min. @3kHz, -53dB Min.
- POTS loop current: 100mA DC
- Envelope delay distortion (0.6 to 3.4kHz): 100uS. Max.
- Impedance(@300Hz to 3.4kHz): 600 Ohm




Part No.: WT- 05 / Model No.: SP- 203

Mechanical

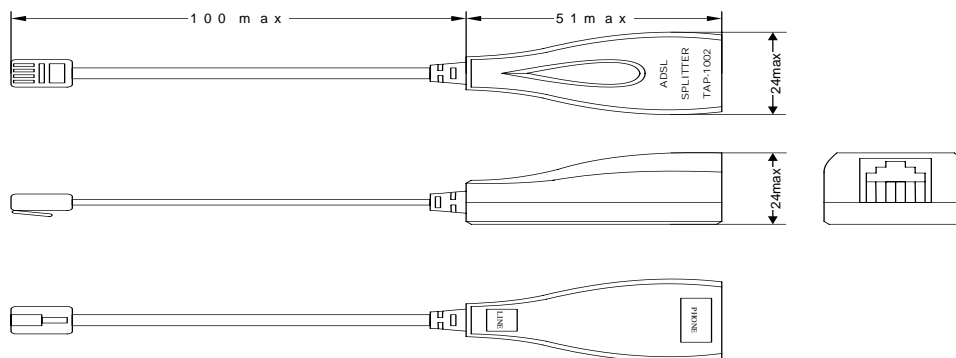

Schematic

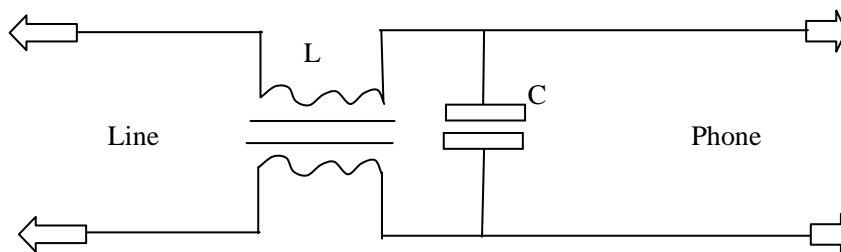

For More Information :