


Features

- POTS-3dB CUTOFF FREQUENCY: 10KHZ
- ATTENUATION:300HZ-3.4KHZ -1.0dB MAX
- INSERTION LOSS(30KHZ TO 60KHZ): -35dB MIN
- INSERTION LOSS(90KHZ TO 300KHZ): -40dB MIN
- INSERTION LOSS(500KHZ TO 1104KHZ): -55dB MIN
- D. C, RESISTANCE EACH LINE: 50 OHM MAX
- INSERTION LOSS(@200HZ TO 1020HZ): -1dB MAX
- LONGITUDINAL BALANCE(CMRR): (@200HZ TO 1KHZ): -58dB Min (@3KHZ): -53dB Min
- RETURN LOSS: 300-3.4KHZ -14dB Min
- POTS LOOP CURRENTS: 100mA DC
- ENVELOPE DELAY DISTORTION:(0.6 TO 3.4KHZ): 100uS MAX
- IMPEDENCE (@300HZ TO 3.4KHZ): 600 OHM




Part No.: WT- 04 / Model No.: SP- 208

Mechanical

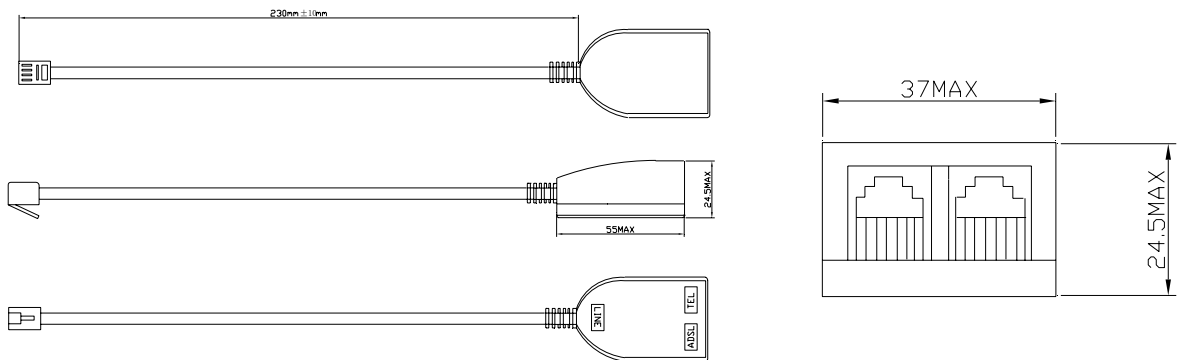

Schematic

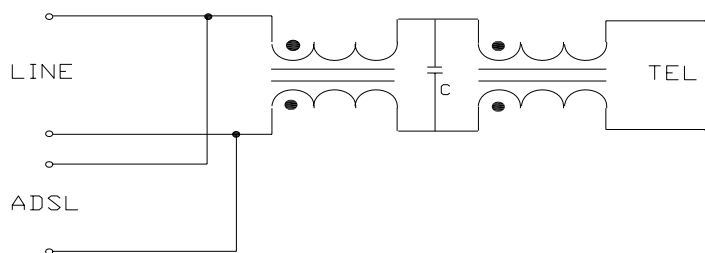

For More Information :