



Features

- POTS -3dB cutoff frequency: 10kHz,
- Attenuation: 200Hz-4kHz, ± 1 dB Max
Attenuation: 30kHz-1104kHz, 40 dB Min
- D.C. Resistance each line: 50hm Max.
- Insertion loss (@300Hz to 3.4kHz) -1dB Max.
- Return loss: 300-3.4kHz, -14dB Min.
- Longitudinal balance(CMRR): @60Hz to 600Hz, 40 dB Min.
@600Hz, to3.4k, 46 dB Min.
- POTS loop current: 100mA DC
- Envelope delay distortion (0.6 to 3.4kHz): 100uS. Max.
- Impedance(@300Hz to 3.4kHz): 600 Ohm
- Used for Brazil

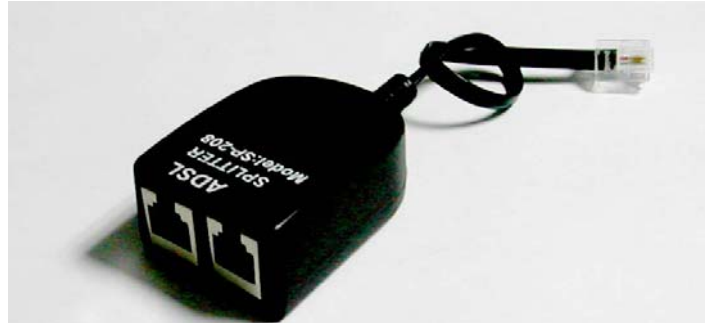

Part No.: WT- 011 / Model No.: SP- 208

Mechanical

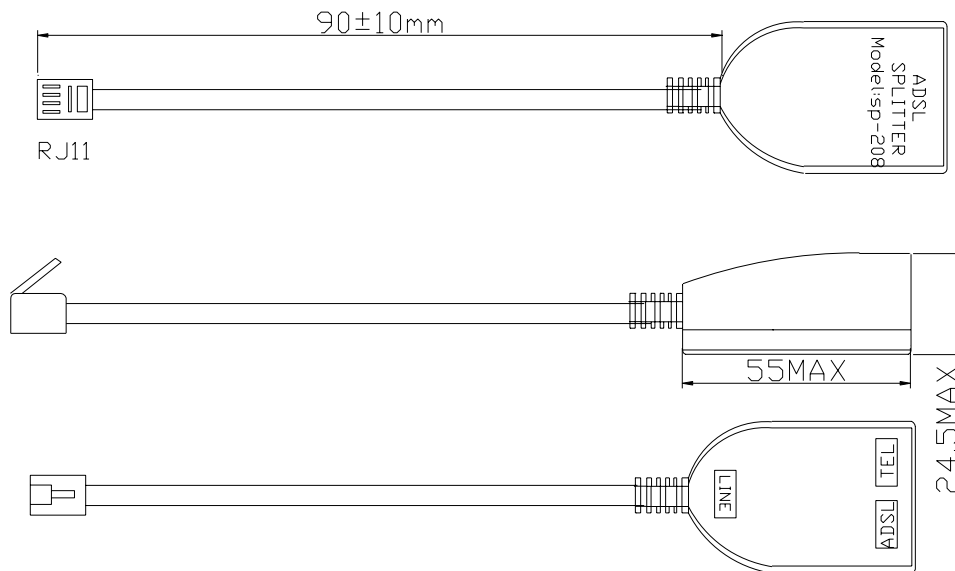

Schematic

